

Saffire™ EVO LZ-M

Wi-Fi Mortise Lock



Applications

- Add smart locks for new construction projects or retrofits
- Get notifications, including events and access anomalies
- Manage access rights to allow or revoke access for residents and visitors in real-time, from anywhere
- Easily send digital keys or PIN codes to residents and visitors from a mobile device
- Residents can use their mobile device, RFID credentials, or PIN to access their residence or common areas
- Provide convenient one-time or recurring access PINs to service and maintenance personnel
- Control when and where residents and visitors can go throughout the building
- Quickly delete lost access media to keep the building secure.

Overview

Saffire EVO LZ-M is a Wi-Fi lock that combines high-performance with aesthetics, seamlessly integrating with building technology providers and amenities for multihousing properties. The Saffire EVO LZ-M provides an easy-to-use, secure and flexible solution with the benefits of real-time connectivity. It includes the convenience of using either mobile devices, RFID credentials or secure PINs for access to resident units, common areas and perimeter doors.

Security with IoT connectivity

The Saffire EVO LZ-M is equipped with Wi-Fi onboard, ensuring connectivity to the dormakaba Lyazon cloud and seamless

integration to our Lyazon partner platforms for real-time events and user notifications. Online connectivity of the Saffire EVO LZ-M also provides continuous updates for built-in device security.


Designed for our aggregator partners

The Saffire EVO LZ product portfolio is specifically designed to be integrated with our dormakaba Lyazon partner platforms to ensure a premium user experience for multifamily residents. The dormakaba Saffire EVO LZ cloud-connected smart locks allow easy access management of residences, amenities, common areas and perimeters, all through a single integrated platform.

Security features

- Online connectivity ensures continuous firmware updates for increased device security
- BHMA A156.13 Grade 1
- UL 10C 3-hour fire rating
- Non-volatile memory maintains lock programming and audit records
- Staff monitoring with RFID keycard audits
- Tamper-proof design
- No need to visit the lock to update access

Factsheet

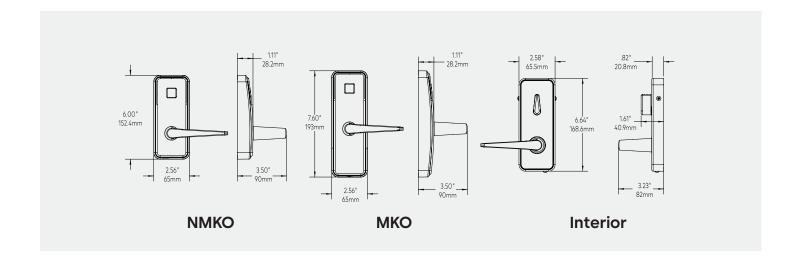

Mechanical Features

Description Online connectivity ensures continuous updates for increased device security. Supports dormakaba RFID,

Bluetooth, and keypad credentials

Handing Left or right factory-handed mortise, field-reversible handing (lever and mortise)

Levers Essen, Von and Long return

Finishes** 626 satin chrome, 606 satin brass, 619 satin nickel, 625 bright chrome, 613 oil-rubbed bronze, and 622 black.

Door Thickness From 1 3/8" to 2 1/2" (35mm to 64mm)

Standard Backset ASM: 2 3/4" (70mm)

Locking Options ANSI Grade 1 mortise lock case with 1 1/4" or 1" lock front mortise with optional automatic deadbolt

Batteries 3AA. Low-battery indicator to help with preventative maintenance. It is visible on the device and has an event no-

tification in the system. Passive waring and notification.

Concealed Key Override Optional: Lori KIK core (keyed-alike, master key)

Electronic Battery

Backup

Electronic lock power supply (ELPS) battery back-up. ELPS part number 118-515990

Wi-Fi Online Control Wi-Fi 802.11 b/g/n WPA2, WPA AES 128 and TLS 1.2>/-70dB signal strength at the lock

Mobile Access

BLE EnabledBluetooth Low Energy 2.4 GHz version 4.2, iOS or Android mobile device support, AES 128 and DTLS security,

supported through partner mobile app

^{**} dormakaba utilizes PDV (physical vapor deposition) finishes in some instances

Lock Operation

New credentials applied to lock through Wi-Fi No Touring **Electronic Access** User defined: customizable access for residents, visitors and property managers available through partner application Date/time Stamp Real time: date and hours/minutes; automatically adjusts for daylight saving time **Audit Trail** Audit trail managed through Wi-Fi. 5,000 events **Toggle Mode** Use of credential is needed to lock the door after exiting unit. This stops accidental resident lockouts and delivers full audit trail to ownership/management **Credential Formats** dormakaba ComID high-security credentials 13.56MHz MIFARE DESFire EV2/EV3 ISO card or fob/mobile access credentials (BLE) / 6-digit PIN codes Feedback LED Light indicators **Diagnostics** Lock diagnostics through partner application **Certifications &** Testing Certification BANSI/BHMA A156.25 (pending), ANSI/BHMA A156.13 Grade 1, Florida Building Code HVHZ / Non-HVHZ **Accessibility Standard** Complies with 2010 ADA Standards for Accessible Design - Art. 309.4 (Operable Parts). For models with long lever only. Lock shall be properly aligned with the mortise or latch and must be installed strictly according to the dormakaba installation instructions and the ADA Standards and Regulations applicable for each facility, to be able to fulfill compliance with ADA requirements. **Fire Rating** Meets UL 10C and ULC S-104, on fire door rated up to and including 3 hours with dormakaba ANSI mortise lock **Electronics** Compliant with RED Directive 2014/53/EU for electromagnetic compatibility and FCC part 15 and RSS-247 Industry Canada requirements

-31°F to 158°F (-35°C to 70°C), 0% to 90% non-condensing humidity at 86°F (30°C) meets IP54

Warranty

Environmental
Operating Conditions

Standard Warranty Two years

Any questions? We would be happy to advise you.

Contact us at: 1800 849 8324